

2022

SILVERADO SPECIAL SERVICE















About This Publication

This catalog is not updated during the model year and should not be used for ordering purposes. It is intended as a source of basic information. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. General Motors reserves the right to make changes at any time without notice. For further details, consult your local dealer.

Care must be taken during customer installation of equipment and wiring to ensure that all holes drilled in the body are corrosion protected, properly sealed and that vehicle wiring harnesses, piping or other components have not been displaced or damaged. Aftermarket equipment installers must be mindful of applicable Federal Motor Vehicle Safety Standards. This information can be obtained directly from the National Highway Traffic Safety Administration. Adding non-dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed. Please return all police vehicles to factory condition and settings upon decommissioning to prevent civilians from using these new 2022 calibrations, lighting and other features intended only for police and emergency customers. Wiring connection or splice changes are to be removed before the vehicle is returned to civilian use.

These vehicles are equipped with an airbag system. The airbag system in your police vehicle includes frontal driver and front outboard passenger airbags, front seat back side impact airbags and roof rail mounted head-curtain airbags. Customer installed equipment such as security barriers behind the front seats should not be mounted so that the barrier ends are within the side airbag deployment zones. The sensors and other components for the airbag system must not be relocated to accommodate the installation of customer furnished equipment; please refer to the service manual for sensor and other component locations. For information concerning instrument panel top pad mounted equipment and airbag system deployment zones, see the airbag information section in this catalog and the vehicle owners manual.

A note about vehicle alterations by independent suppliers: This catalog shows pictures of vehicles that have been altered or upfitted with equipment or components supplied to Chevrolet or its dealers by independent suppliers. GM is not responsible for the safety or quality of design features, materials or workmanship of any alterations by third parties.

INDEX

2022 SILVERADO LTD SPECIAL SERVICE 5W4

- UPDATES FOR 2022 MODEL YEAR
- STANDARD FEATURES
- POWERTRAIN & EMISSIONS
- COLORS & INTERIOR TRIM
- OPTIONAL EQUIPMENT
- SPECIFICATIONS
- ILLUSTRATION HIGHLIGHTS
- OnStar BUSINESS SOLUTIONS OFFERS OnStar SAFETY SERVICES, OnStar
 VEHICLE INSIGHTS, API (APPLICATION PROGRAMMING INTERFACE) & DATA
 SERVICES & IN-VEHICLE WI-FI
- AIRBAG DIMENSIONS
- AIRBAGS FAQ
- STABILITRAK
- MAINTENANCE AND LIMITED WARRANTY





Standard 120-volt power outlet in bed



Standard 7" diagonal touchscreen radio

UPDATES FOR 2022

STANDARD NEW FEATURES

 L84 5.3L Ecotec3 V8 with the (MQE) 8-speed transmission is now standard with the 5W4 package

NOTE: This vehicle is not designed nor intended for use in high speed emergency vehicle operations. Special Service Package, includes: 5.3L EcoTec3 V8 Engine, heavy-duty air cleaner, 220-amp alternator, 120-volt IP power outlet, 120-volt bed-mounted power outlet, calibration that disables remote key panic button and exterior lights/horn as factory default. Surveillance Mode Calibration disables interior and exterior lighting when activated, Also includes Fleet Convenience Package.

SSV is only available as 1WT on the following models:

2 Wheel Drive CC18543 Short Box (5 feet 8 inches) 4 Wheel Drive CK18543 Short Box (5 feet 8 inches) 2 Wheel Drive CC18743 Standard Box (6 feet 6 inches)

4 Wheel Drive CK18743 Standard Box (6 feet 6 inches)

	STANDARD 1WT INTERIOR FEATURES
AIR CONDITIONING	Single-zone with rear Heating/Cooling air vents.
ASSIST HANDLES	Front A-pillar mounted for driver and passenger, rear B-pillar mounted.
AUDIO SYSTEM FEATURES ¹	Chevrolet Infotainment System3 with 7" diagonal color touch-screen, AM/FM stereo with seek-and-scan and digital clock, includes Bluetooth streaming audio for music and select phones; featuring Android Auto and Apple CarPlay capability for compatible phones. Includes 6 speaker system.
BLUETOOTH®2	Personal cell phone connectivity to vehicle Infotainment System.
COMPASS	Located in instrument cluster. Requires UE1 OnStar
CONVENIENCE PACKAGE	Includes, Remote Keyless Entry, EZ Lift power lock and release tailgate, cruise control and power mirrors. When ordered with (PQA) WT Safety Package, (DLF) power mirrors include (UKC) Lane Change Alert with Side Blind Zone Alert and (DP6) high-gloss mirror caps.
DOOR LOCKS	Power
DRIVER INFO. CENTER	3.5 inch diagonal monochromatic display, provides warning messages and basic vehicle information
FLOOR COVERING	Rubberized Vinyl (Floor mats not included)
INSTRUMENTATION CLUSTER	6-gauge cluster featuring speedometer, fuel level, engine temperature, tachometer, voltage and oil pressure
MIRROR	Inside rearview manual tilt
POWER OUTLET	Located on Instrument panel and Bed Mounted 120-volt (400 watt).
REAR VISION CAMERA ³	Shows the driver an image of the area directly behind the vehicle on the center stack when in Reverse at low speeds. Also, includes dynamic guiding lines.
RESTRAINT SYSTEM ⁴	Seat belts at all designated seating positions with driver and front outboard passenger pretensioners. Airbags: Dual-stage frontal airbags for driver and front outboard passenger; includes front outboard Passenger Sensing System. Seat-mounted side-impact airbags for driver and front outboard passenger; Head Curtain airbags for front and rear outboard seating positions. NOTE: Nine inch seat belt extenders are available (part number 19259268) through our dealers at no charge.
SEAT, FRONT	40/20/40 Split Bench with arm rest storage and Vinyl trim. Driver and front passenger seat adjuster are 4-way manual (for cloth trim and power seat availability see seat availability page).
SEAT, REAR	60/40 folding bench (folds up), 3-passenger (includes child seat top tether anchor). Includes Rear seat reminder. ⁵
SURVEILLANCE MODE	Calibration to disable interior & exterior automatic lighting. Feature is activated by adding wire connection to the BCM by customer/upfitter.
STEERING COLUMN	Tilt-Wheel, manual with wheel locking security feature
TEEN DRIVER MODE	Configurable feature that lets you activate configurable features that activates vehicle settings associated with a key fob, to encourage safe driving behavior. It can limit certain vehicle features, and it prevents certain safety systems from being turned off. An in-vehicle report card gives you information on driving habits and helps you to continue to coach your new driver.
TEMPERTURE DISPLAY	Exterior temperature display located in radio display
THEFT DETERRENT SYSTEM	Vehicle Immobilizer (prevents vehicle start without correct key or remote). Content Theft System not available. See your Owner's Manual for system information.
USB PORT	Two ports located on instrument panel
WINDOWS	Power front, drivers express up/down. Front passenger express down. Rear power express down.
	STANDARD 1WT EXTERIOR FEATURES
BUMPER FRONT	Black (semi-gloss).
BUMPER REAR	Black (semi-gloss) with corner step.
CARGO TIE DOWN	12 fixed, Rated at 500 pounds per corner.
CAPLESS FUEL FILL	The vehicle has a capless refueling system and does not have a fuel cap. The filling nozzle must be fully inserted and latched prior to starting fuel flow. NOTE: Overfilling the fuel tank by more than three clicks of a standard fill nozzle may cause vehicle performance issue, including engine stalling and damage to the fuel system, fuel spills, potential fuel fires
DOOR HANDLES	Black
GLASS	Solar absorbing, tinted.
GRILLE	Black bars with mesh inserts
HEADLAMPS	Halogen reflector with halogen Daytime Running Lamps and Automatic exterior lamp control. Altering headlamp assembly is not-Recommended. General Motors is not responsible for the effects of any modifications
LAMPS	Cargo area, cab mounted integrated with center high mount stop lamp, with switch in bank on left side of steering wheel
MIRRORS, OUTSIDE	Black, Manual

1. Functionality varies by model. Full functionality requires compatible Bluetooth and smartphone, and USB connectivity for some devices 2. Go to myChevrolet.com/learnAbout/bluetooth to find out which phones are compatible with the vehicle 3. Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather, and road conditions may affect feature performance. Read the vehicle's owner's manual for more important feature limitations and information. 4. Always use seat belts and child restraints. Children are safer when properly secured in a rear seat in the appropriate child restraint. See the Owner's Manual for more information 5. Does not detect people or items. Always check rear seat before exiting.

POWER OUTLET	Bed mounted 120-volt (400 watt). Included as part of ZLQ WT Fleet Convenience Package.
PICKUP BED	Built from high-strength roll-formed steel for durability with 12 fixed corner tie downs and 120v outlet
RECOVERY HOOKS	Front, frame-mounted, Black Included with 4WD models or included and only available on 2WD models with (PQA) WT Safety Package NOTE: Front recovery hooks are for vehicle recovery only. To avoid the risk of injury, never use recovery hooks to tow a vehicle.
TAILGATE	Gate function manual, no lift assist. Locking, utilizes same key as ignition and door. Includes Tailgate and bed rail protection cap.
TAILLAMPS	Incandescent tail, stop and reverse lights
TIRES	255/70R17 all-season, blackwall (includes P255/70R17 All-season blackwall spare tire)
TIRE PRESSURE MONITOR WITH TIRE FILL ALERT	Tire Pressure Monitoring System. Standard spare wheel not equipped with TPM sensor. Includes Tire Fill Alert in addition to the DIC warning when a tire has low pressure. This feature provides audible and visual indication when air is being added to the low tire to aid in achieving optimal tire pressure.
TIRE, SPARE CARRIER	Keyed cylinder lock utilizes same key as ignition and door
WHEELS	17 inch x 8 inch Ultra Silver Painted Steel, includes spare
	STANDARD 1WT CHASSIS FEATURES
AIR FILTER	High capacity air filter (K47) included with 5W4 special service package.
ALTERNATOR	220 amp Charging System with Idle Boost increases alternator output at idle with increased electrical load. See Specifications page for Alternator Output Chart.
BATTERY	Heavy-duty 720 cold-cranking amps/80 Amp-hr, maintenance-free with rundown protection and retained accessory power
BRAKES	4-wheel disc with DURALIFE rotors, 4-wheel antilock
BRAKE WEAR	Brake wear indicator
BRAKE PAD LIFE DISPLAY	Displays an estimate of the remaining life of the front and rear brake pads. Messages will display based on brake pad wear and the state of the system. Reset the Brake Pad Life display after replacing the brake pads. See Brake Pad Life
BRAKE PAD LIFE SYSTEM	Tells when to Change Brake Pads. Brake pad life is displayed in the Driver Information Center (DIC), along with a percentage for each axle. When the system has determined that the brake pads need to be replaced a message will display which may include mileage remaining. Brake pads should always be replaced as complete axle sets.
ENGINE	5 .3L EcoTec3 V8, (355 hp [265 kW] @ 5600 rpm, 383 lb-ft of torque [518 Nm] @ 4100 rpm); featuring available Dynamic Fuel Management that enables the engine to operate in 17 different patterns between 2 and 8 cylinders, depending on demand, to optimize power delivery and efficiency. Includes Automatic Start/Stop (KL9).
FRAME	Fully-boxed, hydroformed front section
FUEL TANK	Approximately 26 gallon (98 liter)
OIL COOLING	External engine oil cooler and auxiliary transmission oil cooler
RADIO SUPPRESSION	The Silverado vehicle systems are designed to prevent unwanted emissions and to minimize susceptibility and maximize immunity to external emissions (Electromagnetic (EMI) or Radio Frequency (RFI) Interference). Most emergency vehicle communications equipment operating at frequencies in the VHF Band (30-300 MHz) and up to frequencies in the UHF Band (300 MHz-3GHz) will function as intended without enhanced noise suppression.
REAR AXLE	3.23
STABILITRAK	Stability control system with Proactive Roll Avoidance and traction control includes electronic trailer sway control and hill start assist. For description see Stability Control and Traction Control section
STEERING	Electric Power Steering (EPS) assist, rack-and-pinion
SUSPENSION, FRONT	Independent, coil over shock, includes 35mm twin tube shock absorbers
SUSPENSION, REAR	2-Stage multi-leaf springs, semi-elliptic
TRANSFER CASE	Single speed, electronic Autotrac with rotary dial control.
TRANSMISSION	8-speed automatic electronically controlled with overdrive and tow/haul mode. Includes Cruise Grade Braking and Powertrain Grade Braking
LIMIITED WARRANTY	See Maintenance and Warranty section for description

AVAILABLE EXTERIOR COLORS ACTUAL COLORS MAY VARY



SEO PAINT AVAILABLE ACTUAL COLORS MAY VARY



NOTE:

- Actual color may very
- GM will require 5 orders before sending to the plant
- · May require extended lead time.

AVAILABLE INTERIOR COLOR ACTUAL COLORS MAY VARY



WORK TRUCK CONVENIENCE PACKAGES

- **ZLQ** WORK TRUCK CONVENIENCE PACKAGE 1 Includes Remote Keyless Entry (AQQ), EZ lift tailgate with power lock and release (QT5), Cruise control (K34), and Outside power adjustable and hearted mirrors (DLF).
- PCV WORK TRUCK CONVENIENCE PACKAGE 2 Includes ZLQ above plus deep tinted glass (AKO) and Rear defogger (C49)

OPTIONAL INTERIOR FEATURES

- VV4 LTE WI-FI® HOTSPOT1 Can connect up to 7 devices; includes data trial for 1 month or 3GB (whichever comes first) Service varies with conditions and location. Available Wi-Fi requires compatible mobile device, active OnStar service and data plan. Data plans provided by AT&T. Visit www.OnStar.com/BusinessSolutions for details and system limitations.
- **UTQ** ALARM, HORN CONTENT THEFT DETERRENT, DISABLED Calibration disables the horn for the theft deterrent alarm. Requires CC18743 and CK18743 model and (5W4) Special Service Vehicle
- RIA ALL WEATHER FLOOR LINER 1st and 2nd rows (includes Chevrolet Bowtie logo). Requires (B30) color-keyed carpeting.
- **5J1 CALIBRATION, KEYLESS REMOTE PANIC BUTTON EXTERIOR LIGHT/HORN DISABLE -** Included with CC18743 and CK18743 model and (5W4) Special Service Vehicle
- **5J3 CALIBRATION, SURVEILLANCE MODE INTEROR LIGHTING** Calibration to disable interior automatic lighting. Feature is activated by adding wire connection to the BCM by customer/upfitter. Requires CC18743 and CK18743 model and (5W4) Special Service Vehicle
- K34 CRUISE CONTROL Electronic with set and resume speed, steering wheel-mounted. Included with (ZLQ) WT Fleet Convenience Package
- C49 DEFOGGER, REAR WINDOW Electric
- **B30** FLOOR COVERING Color-keyed carpeting. Includes front and rear vinyl floor mats
- 6N5 INOPERATIVE REAR WINDOWS
- 6N6 INOPERATIVE REAR DOOR LOCKS AND HANDLES Doors can only be opened from outside
- **BCV** LOCK CONTROL REAR DOOR, AUTO DOOR LOCKS DISABLE Calibration disables auto door locks and is activated through radio or DIC settings. Requires CC18743 and CK18743 model and (5W4) Special Service Vehicle and Government order.
- **ONSTAR®** Fleet orders of properly equipped vehicles receive a 3-month trial of Driver Remote Access Plan, 3 months of Safety & Security coverage, and 1 month or 3GB of data (whichever comes first) from vehicle delivery date. Certain services require working electrical system, cell reception and GPS signal. OnStar links to emergency services. Data plans offered by AT&T. See OnStar.com/BusinessSolutions for details. Services subject to Terms and limitations and availability is subject to change.
- **UD7 REAR PARK ASSIST² -** Ultrasonic Requires (R13) WT Appearance Package, (Z82) Trailering Package, (JL1) trailer brake controller, (ZLQ) WT Fleet Convenience Package and (Kl4) power outlet.
- **VBJ REAR UNDERSEAT STORAGE -** Composite storage bin (see optional equipment section for illustration)
- **RGE** SAFETY CONFIDENCE PACKAGE Includes K34-Cruise control, UK3-steering Wheel Controls, UEU-Forward Collision Alert², UKJ-Front pedestrian braking², UHY-Auto emergency braking², and UDD-Driver information center.
- **5T5 SEATS -** Front cloth and second row vinyl.
- **SEAT ADJUSTER -** Driver 10-way power seat including lumbar. Requires (ZLQ) WT Fleet Convenience Package, (KI4) 120-volt power outlet and (KC9) 120-volt bed-mounted power outlet
- **THEFT DETERENT SYSTEM FLEET IMMOBILIZER -** In the absence of master key, reduces roadside key relearn process to (3) two-minute cycles in place of the standard (3) ten-minute cycles. This option will also allow for only one learned key to be needed when adding additional keys instead of 2 learned keys. Requires a Fleet or Government type order.
- **9L7 UPFITTER SWITCH KIT -** Provides 5-30 amp circuits to facilitate installation of aftermarket electrical accessories. Kit with all required parts will be shipped loose with the truck for installation by the dealer or upfitter. Installation instructions and technical assistance available at www.gmupfitter.com.
- **6J4 WIRING -** Horn and siren circuit. Requires Kerr Industries ship thru (GEZ).
- 6J3 WIRING Provisions for grille lamps and siren speakers. Requires Kerr Industries ship thru (GEZ).
- **ZLQ** WT FLEET CONVENIENCE PACKAGE Includes: Remote Keyless Entry, EZ Lift power lock and release tailgate, cruise control, power mirrors. When ordered with WT Safety Package, power mirrors include Lane Change Alert with Side Blind Zone Alert² and high-gloss mirror caps.
- PQA WT SAFETY PACKAGE Includes (UD5) Front and Rear Park Assist², (UKC) Lane Change Alert with Side Blind Zone Alert², (UFG) Rear Cross Traffic Alert², (V46) Chrome front bumper, (VJH) Chrome rear bumper and (DP6) high gloss Black mirror caps. Includes Perimeter Lighting. Requires (PCV) WT Convenience Package or (ZLQ) WT Fleet Convenience Package and (KI4) 120-volt power outlet. 2WD models include (V76) recovery hooks. Not available with (UD7) Rear Park Assist².

OPTIONAL EXTERIOR FEATURES

- VQO ASSIST STEP Black work step, Included with (PDW) Assist Step and Tonneau Value Package. Not available with any other assist steps.
- **PDW** ASSIST STEP AND TONNEAU VALUE PACKAGE Includes (VQO) Black work step, (63B) Tri-fold soft tonneau cover. Requires Crew Cab or Double Cab model. Not available with (PDR) Assist Step and Tonneau Package or any other assist steps or tonneau covers.
- VXH ASSIST STEPS Chromed tubular, 6" rectangular. Not available with any other assist steps.
- VXJ ASSIST STEPS Chromed round 4". Not available with any other assist steps
- RVQ ASSIST STEPS Black 6" tubular rectangular. Not available with any other assist steps

RVS ASSIST STEPS - Black 4" round. Not available with any other assist steps 6SL **ASSIST STEPS -** Off Road. Not available with any other assist steps. CGN BEDLINER, CHEVYTEC SPRAY-ON - Black with Chevrolet logo (does not include spray-on liner on tailgate due to Black composite inner panel). Not available with (ZW9) pickup bed delete. Not available with any Ship Thrus EXCEPT (VCO), (VDT), (VYC) or (VYS). RW9 BEDSIDE STORAGE BOXES - Locking boxes over the wheel well hard plastic weatherproof storage (full length left and right side). Not available with (PDR) Assist Step and Tonneau Package, or (VOZ) Tri-fold hard tonneau cover or (63B) tri-fold soft tonneau cover. See OPTIONAL EQUIPMENT page for picture. **5J9** CALIBRATION, TAILLAMP FLASHER, RED/WHITE - Calibration flashes white (backup) and red (brake lamps) alternately when activated. Requires CC18743 or CK18743 model and 5W4 Special Service Vehicle. VQY CHROME RECOVERY HOOKS - Included and only available with (PDV) Chrome Package. **PDV** CHROME PACKAGE - Includes (VQY) chrome recovery hooks, and VQZ Polished exhaust tip. 9G8 DAYTIME RUNNING LAMPS DELETE - Daytime Running Lamps and automatic headlamp control delete, deletes standard Daytime Running Lamps and automatic headlamp control features from the vehicle for police stealth surveillance. 9M4 DECAL AND NAME PLATE DELETE - Tailgate. Deletes all nameplates and decals on the pickup box tailgate. Not available with SEO (8F2) ornamentation delete. 9R1 DECAL DELETE - Pickup box Deletes the "4x4" decal from the side of the pickup box. Requires 4WD models only. Not available with SEO (8F2) ornamentation delete S3U FOG LAMPS - Front mounted, LED, Requires Fleet or Government order type. **AKO GLASS** - Deep tinted 6E2 KEY SINGLE - Complete vehicle fleet. Provides a single key with a specific code that is common to the door locks and ignition of all the vehicles in the vehicle fleet. Key code is an alternate to SEO 6E8 complete vehicle fleet common key. 6E8 KEY SINGLE - Complete vehicle fleet. Provides a single key with a specific code that is common to the door locks and ignition of all the vehicles in the fleet. Key code is an alternate to SEO 6E2. 5H1 KEY EQUIPMENT - Two additional keys for single key system. Provides two additional spare keys for a total of (4). (Keys will be cut but not programmed). Programming of keys is at customer's expense. Programming keys is not a warranty claim. UF2 LED CARGO AREA LIGHTING - Located in pickup bed, activated with switch on center switch bank or key fob VK3 LICENSE PLATE KIT - Front (will be shipped to orders with ship-to states that require front license plate) DP6 MIRROR CAPS, PAINTED - Body-color. High gloss Black Included and only available with (PQA) WT Safety Package. MIRRORS, OUTSIDE HEATED POWER ADJUSTABLE - Included and only available with (PCV)WT Convenience Package or (ZLQ) WT DLF Fleet Convenience Package. When (PQA) WT Safety Package is ordered, includes (DP6) high gloss Black mirror caps. DPO MIRROR OUTSDE POWER ADJUSTABLE - Adjustable vertical trailering with heated upper glass, lower convex mirrors, integrated turn signals, clearance lamps, and auxiliary lighting. Manual folding/extending. (Requires Z82 Trailering package) QK2 MULTI-FLEX TAILGATE - Six function gate (Primary, easy access, load stop, full width step, inner gate load stop, inner gate work surface) 8F2 **ORNAMENTATION, DELETE** - Deletes decals and nameplates on truck exterior 9V5 PAINT - Solid, Woodland Green All normally body colored non-sheet metal parts will be Black May require extended lead time. Door handles and mirrors will be grain Black Deletes standard/packaged body side moldings. Requires (TGK) Special Paint and (01U) Special 9W3 PAINT - Solid, Wheatland Yellow. All normally body colored non-sheet metal parts will be Black May require extended lead time. Door handles and mirrors will be grain Black Deletes standard/packaged body side moldings. Requires (TGK) Special Paint and (01U) Special Paint. 9W4 PAINT - Solid, Tangier Orange. All normally body colored non-sheet metal parts will be Black May require extended lead time. Door handles and mirrors will be grain Black Deletes standard/packaged body side moldings. Requires (TGK) Special Paint and (01U) **SFW** REAR BACKUP ALARM CALIBRATION - This calibration will allow installation of an aftermarket back-up alarm by disabling rear perimeter lighting. Not available with SEO (8S3) backup alarm. REAR BACKUP ALARM 97 DECIBELS - Not available with SEO (SFW) backup alarm. **8S3 RECOVERY HOOKS -** Front, frame-mounted, Black Standard with 4WD models. Available with 2WD models. V76 NOTE: Front recovery hooks are for vehicle recovery only. To avoid the risk of injury, never use recovery hooks to tow a vehicle. B₁J REAR WHEEL HOUSE LINERS - Requires CGN spray on liner. Liners may be ordered separately as an LPO, S41 **01U** SPECIAL EXTERIOR SPECIAL EXTERIOR COLOR - All normally body colored non-sheet metal parts will be black including front fender extensiol ns, cab spoiler on Double & Crew cabs and LT trim door handles. May require extended lead time. VQK **SPLASH GUARDS, MOLDED -** Black (see optional equipment section for illustration) 7X2 SPOTLAMPS - Left and right-hand pillar mounted, LED. Requires (GEZ) Kerr Industries ship thru. 7X3 SPOTLAMP - Left-hand pillar mounted, LED. Requires (GEZ) Kerr Industries ship thru. 7X6 SPOTLAMP - Left-hand pillar mounted, Halogen. Requires (GEZ) Kerr Industries ship thru. 7X7 SPOTLAMPS - Left and right-hand pillar mounted, Halogen. Requires (GEZ) Kerr Industries ship thru. SAF TIRE CARRIER LOCK - Keyed cylinder lock utilizes same key as ignition and door RHM TIRE, SPARE - LT265/70R17 all-terrain, blackwall 1 - When equipped with (E63) Durabed, included and only available with (RC5) LT265/70R17C all-terrain, blackwall tires. Available with and requires (RC5) LT265/70R17C all-terrain, blackwall tires. XCQ TIRE, SPARE - 265/70R17SL all-season, blackwall. Requires (QDV) 265/70R17 all-terrain blackwall tires or all 18" wheels and tires

- QDV TIRES 265/70R17 all-terrain, blackwall
- RC5 TIRES LT265/70R17C all-terrain, blackwall. Includes spare tire
- R30 TIRES, LT275/65R18C MT Goodyear Wrangler DuraTrac, Blackwall. Requires (Z71) Off-Road Package and (PZX) 18" Bright Silver painted aluminum wheels
- **TIRE, SPARE 265/70R17 -** Replaces the standard blackwall all-season spare tire with all-terrain tread spare matching road tires. Requires 4WD model and (QDV) 265/70R17 all-terrain, blackwall tires. Not available with (5Z4) spare wheel, carrier and lock delete
- VQT TONNEAU COVER Hard tri-folding with vinyl cover, Requires (UF2) LED Cargo Box Lighting
- **TRI-FOLD SOFT TONNEAU COVER -** Included with (PDW) Assist Step and Tonneau Value Package, LPO. Not available with any other tonneau cover.
- VOZ TRI-FOLD HARD TONNEAU COVER Included with (PDR) Assist Step and Tonneau Package, Not available with any other tonneau cover.
- **PZX** WHEELS 18" x 8.5" (45.7 cm x 21.6 cm) Bright Silver painted aluminum. Requires Crew Cab or Double Cab model, (Z71) Z71 Off-Road Package and (R3O) 265/70R18SL maximum traction tires.
- Q5U WHEELS 17" x 8" (43.2 cm x 20.3 cm). Bright Silver painted aluminum. Cannot be ordered with VYU Snow Plow Prep.
- **RPP** WHEELS 17" x 8 (43.2 cm x 20.3 cm). Black painted steel.
- SFE WHEEL LOCKS Set of 4
- **WHEEL, SPARE** Carrier and lock delete. Deletes the base spare wheel, carrier and lock. Does not delete jack or tools. Requires SEO (9L3) spare tire delete. Not available with (RC3). Tires, 265/70R17 all-terrain, blackwall.
- **OOA** WHEEL, SPARE Upgrade. Replaces Black standard spare wheel and upgrades to a matching Silver steel road wheel. Includes tire pressure monitoring sensor. Requires (RD6) painted steel wheels. Not available with SEO. (5Z4) spare wheel, carrier and lock delete.
- **R13 WT APPEARANCE PACKAGE -** Includes (V46) Chrome front bumper, (VJH) Chrome rear bumper and (Q5U) 17" Bright Silver painted aluminum wheels. Not available with (Z71) Off-Road Package.

OPTIONAL MECHANICAL FEATURES

- KO5 ENGINE BLOCK HEATER
- **FLEET MAINTENANCE CREDIT -** This option code provides a credit in lieu of the free oil changes, tire rotations and inspections otherwise included for one maintenance service during 1st year of ownership. The invoice will detail the applicable credit. The customer will be responsible for all oil change, tire rotations and inspections costs for this vehicle. Requires one of the following Fleet or Government order types: FBC, FBN, FCA, FCN, FLS, FNR, FRC or FGO. Not available with FDR order types.
- **9C2 GOVERNOR, ELECTRONIC SPEED SENSOR SET TO 65 MPH -** Provides electronic software to limit maximum road speed to 65-MPH. Cruise control limited to 60 MPH.
- **9B9 GOVERNOR, ELECTRONIC SPEED SENSOR SET TO 70 MPH -** Provides electronic software to limit maximum road speed to 70-MPH. Cruise control limited to 65 MPH
- **9D7 GOVERNOR, ELECTRONIC SPEED SET TO 75 MPH -** Provides electronic software to limit maximum road speed to 75-MPH. Cruise control limited to 70 MPH.
- **271 OFF-ROAD PACKAGE -** Off-Road Package, Includes (Z71) Off-Road suspension, (JHD) Hill Descent Control, (NZZ) skid plates, (K47) heavy-duty air cleaner and Z71 hard badge. Requires 4WD model, (Z82) Trailering Package and AT or MT tires. Includes (G80) locking differential and (NQH) 2-speed transfer case. Not available with (R13) WT Appearance Package.
- **G80 REAR DIFFERENTIAL -** Heavy-duty locking
- JL1 TRAILER BRAKE CONTROLLER integrated (requires Z82 trailering package)
- NQH TRANSFER CASE, TWO-SPEED Electronic Autotrac with rotary dial control (4WD models only) Included and only available with (Z71) Off-Road Package.
- **TRAILERING PACKAGE -** Includes trailer hitch, 7-pin and 4-pin connectors and (CTT) Hitch Guidance¹ with (L84) 5.3L EcoTec3 V8 engine requires (G80) locking differential
- NZZ SKID PLATES Included with (BAQ) Work Truck Package, (Z71) Off-Road Package or (VYU) Snow Plow Prep Package.
- **VKZ SHIP THRU -** Produced in Silao Assembly and shipped to Kerr Industries. Returned to Arlington Assembly for shipping to final destination (Dealer Invoice = \$510.00).
- **BAQ** WORK TRUCK PACKAGE Includes (NZZ) skid plates and (K47) heavy-duty air cleaner. Requires 4WD model, (QDV) 265/70R17 blackwall all-terrain tires or (RC5) LT265/70R17C all-terrain tires. Not available with (Z71) Z71 Off-Road Package or (VYU) Snow Plow Prep Package

NOTE: See dealer for additional dealer installed accessories.

SPECIFICATIONS 5.3L ENGINE (L84) WITH 8-SPD TRANS (MQE)

2-WHEEL DRIVE		
Model	CC18543 Short Box	CC18743 STD Box
Projected top speed ¹ (without equipment) Varies k	y tire. See T	ire Chart.
Projected top speed in reverse (without equipment)	23 mph	23 mph
EPA-ESTIMATED MPG GASOLINE FUEL ECONOM	Y RATINGS	
5.3L gas engine 2WD (City/Highway/Combined)	16/21/18	16/21/18
VEHICLE WEIGHT (LBS./KG.)		
Seating capacity (F/R)	3/3	3/3
GVWR ³ (Gross Vehicle Weight Rating)	6900/3130	6900/3130
FGAWR (Front Gross Axle Weight Rating)	3700/1678	3700/1678
RGAWR (Rear Gross Axle Weight Rating)	3800/1724	3800/1724
Payload ⁴	2060/935	1990/900
Base curb weight	4800/2177	4880/2213
Maximum Trailering Capacity ⁵	9700/4400	9600/4355

4-WHEEL DRIVE		
Model	CK18543	CK18743
	Short Box	STD Box
Projected top speed ¹ (without equipment) Varies	by tire. See T	ire Chart.
Projected top speed in reverse (without equipment)		23 mph
EPA-ESTIMATED MPG GASOLINE FUEL ECONOM	Y RATINGS	
5.3L gas engine 4WD (City/Highway/Combined) 15/20/17	15/20/17
VEHICLE WEIGHT (LBS./KG.)		
Seating capacity (F/R)	3/3	3/3
GVWR ³ (Gross Vehicle Weight Rating)	7100/3220	7100/3220
FGAWR (Front Gross Axle Weight Rating)	3800/1724	3800/1724
RGAWR (Rear Gross Axle Weight Rating)	3800/1724	3800/1724
Payload ⁴	2060/935	2010/910
Base curb weight	5010/2272	5060/2295
Maximum Trailering Capacity ⁵	9500/4310	9400/4265

PASSENGER COMPARTMENT VOLUME (cu.ft./liters)

	CC18543	CK18543	CC18743	CK18743
Passenger Volume	138.6	138.6	138.6	138.6

FRONT COMPARTMENT (in./mm)

	CC18543	CK18543	CC18743	CK18743
Head room	43.03/1093	43.03/1093	43.03/10934	3.03/1093
Shoulder room	66.02/1677	66.02/1677	66.02/1677 6	6.02/1677
Hip room	61.18/1554	61.18/1554	61.18/1554	61.18/1554
Leg room	44.53/1131	44.53/1131	44.53/1131	44.53/1131

REAR COMPARTMENT (in./mm)

	CC18543	CK18543	CC18743	CK18743
Head room	40.12/1019	40.12/1019	40.12/1019	40.12/1019
Shoulder room	65.16/1655	65.16/1655	65.16/1655	65.16/1655
Hip room	60.24/1530	60.24/1530	60.24/15306	0.24 /1530
Leg room	43.4/1102	43.4/1102	43.82/1113	43.82/1113

^{*}NOTE: Published dimensions indicated are without optional equipment or accessories. Additional accessories or equipment ordered at the customer's request can result in a minor change in these dimensions

CARGO

	CC18543	CK18543	CC18743	CK18743
Cargo volume ¹ , cargo box, cu. ft./liters	62.9/1781.3	62.9/1781.3	71.7/2030.5	71.7/2030.5

EXTERIOR (in./mm)

	CC18543	CK18543	CC18743	CK18743
Wheelbase	147.43/3745.	147.43/3745	156.9/3886	156.9/3886
Overall length	231.7/5885	231.7/5885	241.2/6126	241.2/6126
Body width (without mirrors)	81.24/2063	81.24/2063	81.3/2065	81.3/2065
Overall height*	75.49/1917	75.51/1918	75.51/1918	75.51/1918
Front bumper to back of cab	150.9/3833	150.9/3833	150.9/3833	150.9/3833
Inside length of box				
at floor	69.92/1776	69.92/1776	79.44/2018	79.44/2018
Inside height, bed	22.4/569	22.4/569	22.4/569	22.4/569
Inside bed width	71.4/1814	71.4/1814	71.4/1814	71.4/1814
Inside width, between Wheelhousing, Fleetside	50.63/1286	50.63/1286	50.63/1286	50.63/1286
Turning diameter, curb-to-curb, ft. (m)	46.3/14.1	46.3/14.1	49.5/15.1	49.5/14.1
Ground clearance,*	7.89/200	8.09/205	7.75/197	7.95/202

^{*}Published dimensions indicated are at Base Curb Weight.

^{1.} Adding non dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed. 2. Cargo and load capacity limited by weight and distribution. 3. Gross Vehicle Weight Rating (GVWR). When properly equipped, includes vehicle, passengers, cargo and equipment. 4. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's door jamb. 5. Before you buy a vehicle or use it for trailering, carefully review the Trailering section of the Owner's Manual. The weight of passengers, cargo and options or accessories may reduce the amount you can tow 6. Published dimension indicated is from ground and without optional equipment or accessories. Additional accessories or equipment ordered at the customer's request can result in a minor change in this dimension

SPECIFICATIONS 5.3L ENGINE (L84) WITH 8-SPD TRANS (MQE)

ENGINE	STANDARD
Туре	EcoTec3 V8
Displacement: liters/cu. in.	5.3/325
Horsepower/rpm	355 @ 5600
Torque lbft./rpm	383 @ 4100
Induction system	Direct Injection
Compression ratio	11.0:1
Exhaust	Single
Minimum recommended fuel octane	87
Fuel capacity, approximate, gallon/liters	24/91
Oil with filter (quarts/liters)	8.5/8
Cooling capacity (quarts/liters)	17.4/16.5

TRANSMISSION

Automatic electronic with overdrive and grade braking	8-Speed
---	---------

AXLE

Ratio	3.23
-------	------

BRAKES

ABS with vacuum-boost	Disc/Disc
Front-swept area (sq. in./sq. cm)	257.42/1660.76
Rear-swept area (sq. in./sq. cm)	263.74/1701.58
Total front and rear swept area (sq. in./sq. cm)	521.16/3362.32
Front rotor diameter (in./mm)	13.50/343
Rear rotor diameter (in./mm)	13.58/345
Front rotor thickness (in./mm)	1.18/30
Rear rotor thickness (in./mm)	.79/20

TIRES

Type	All Season, Blackwall
Size	255/70R17

WHEELS

Туре	Painted Steel
Size	17"x 8"

CHASSIS

Frame	Full perimeter steel
Front suspension	Coil over shock with 35mm twin tube shocks
Rear suspension	2-stage multi-leaf springs, semi-elliptic
Steering type	Electric Rack and Pinion
Steering ratio	NA


BATTERY

Type	Maintenance free	
BCI group size	LN3	
Volts	12	
Amp hour rating	70	
Cold cranking-amps @ 0°F (-18°C)	730	

ALTERNATOR

Type		MELCO GX9
Amps	77°F (25°C)	220

SILVERADO SSV ALTERNATOR OUTPUT

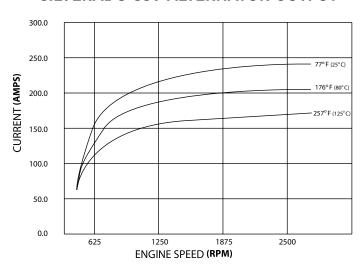

BOOST LEVEL	PARK/NEUTRAL	DRIVE
Normal Idle	550	550
1	800	650
2	800	725
3	1000	800

SPECIFICATIONS 5.3L ENGINE (L84) WITH 8-SPD TRANS (MQE)


NC	PROJECTED TOP SPEED WITH DTE. Adding accessories or making modifications to the vehicle		
CODE	Tire Size	Vehicle Description	3.23 Ratio
QBN	255/70R17 (Standard)	2WD Short Box	99 mph
QDV	265/70R17 (Optional)	2WD Short Box	99 mph
RC5	LT265/70R17C (Optional)	2WD Short Box	99 mph
R30	LT275/65R18C MT DuraTrac (Optional)	2WD Short Box	99 mph
QBN	225/70R17 (Standard)	2WD Long Box	112 mph
QDV	265/70R17 (Optional)	2WD Long Box	112 mph
RC5	LT265/70R17C (Optional)	2WD Long Box	99 mph
R30	LT275/65R18C MT DuraTrac (Optional)	2WD Long Box	99 mph
QBN	225/70R17 (Standard)	4WD Short Box	105 mph
QDV	265/70R17 (Optional)	4WD Short Box	105 mph
RC5	LT265/70R17C (Optional)	4WD Short Box	99 mph
R30	LT275/65R18C MT DuraTrac (Optional)	4WD Short Box	99 mph
QBN	225/70R17 (Standard)	4WD Long Box	99 mph
QDV	265/70R17 (Optional)	4WD Long Box	105 mph
RC5	LT265/70R17C (Optional)	4WD Long Box	99 mph
R30	LT275/65R18C MT DuraTrac (Optional)	4WD Long Box	99 mph


TRAILERING SPECIFICATIONS - Automatic Transmission Ratings with Ball Hitch (L84) 5.3L EcoTec3 V8 DI VVT aluminum block			
MODEL	AXLE RATIO	MAXIMUM TRAILER TOWING LBS. (KG)	
CC18543	3.23	9800(4445)	
CK18543	3.23	9400(4265)	
CC18743	3.23	9700(4400)	
CK18743	3.23	9300(4220)	

Maximum Trailer Towing Rating is calculated based on SAE J2807 (Base vehicle plus one driver plus one passenger plus options). The weight of other optional equipment, passengers and cargo will reduce the Maximum Trailer Towing your vehicle can tow.

GCWR For Engine/Rear Axle Ratio Combination - Automatic Transmission		
MODEL	(GCWR) GR	OSS COMBINATION WEIGHT RATINGS LBS. (KG)
(L84) 5.3L EcoTec3	3.23	15000 (6804)

DIMENSIONS SSV STANDARD BED

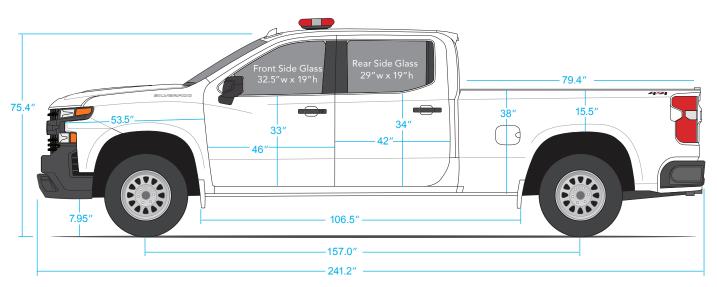

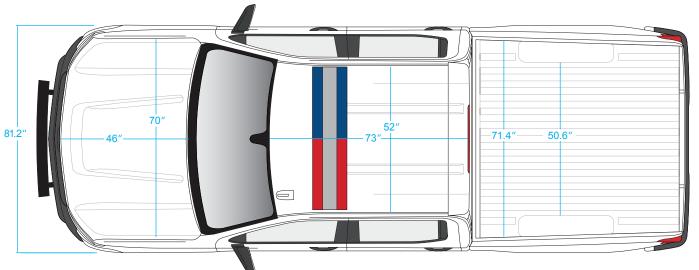



Estimated material sizes to wrap:

- Hood 72" x 50"
- Front Doors 50" x 36"
- Rear Doors 45" x 37"
- Roof 75" x 54"
- Tailgate 69" x 26"



DIMENSIONS SSV SHORT BED

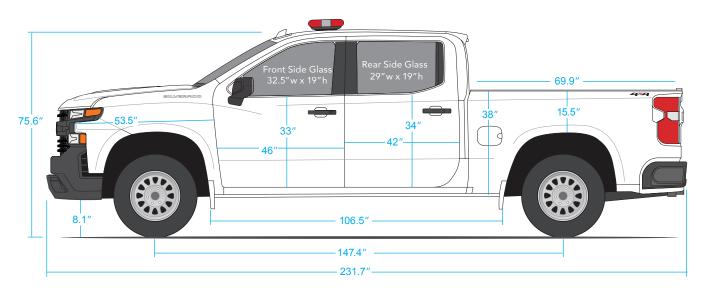

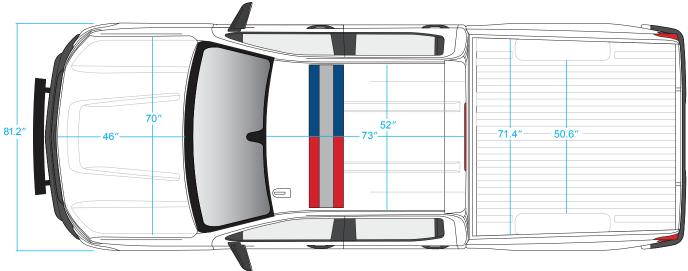

Estimated material sizes to wrap:


- Hood 72" x 50"
- Front Doors 50" x 36"
- Rear Doors 45" x 37"
- Roof 75" x 54"
- Tailgate 69" x 26"









BODY, CAGE, UNDERBODY AND FRAME MATERIAL

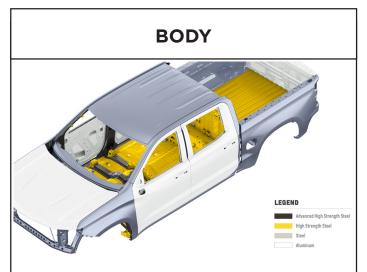


The 2022 Chevrolet Silverado is up to 450 pounds lighter than the previous model through the use of mixed materials. Featuring fixed steel body components and aluminum swing panels (doors, hood, tailgate) the body is up to 88 pounds lighter

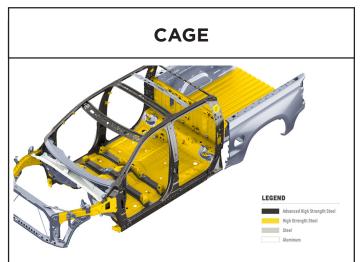

The 2022 Chevrolet Silverado is 450 pounds lighter than the prior model due to the extensive use of mixed materials. The underlying safety cage features significant use of advanced high strength steels, each tailored for the specific application.

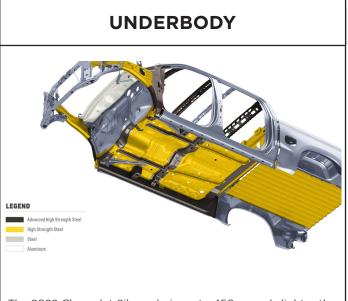

The 2022 Chevrolet Silverado is up to 450 pounds lighter than the previous model due to extensive use of mixed materials.

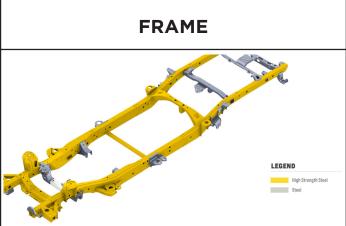

The 2022 Chevrolet Silverado features a fully boxed steel frame that is 88 pounds lighter than its predecessor, while offering 10 percent greater torsional rigidity. Eighty percent of the frame is made of high-strength steel varying from 2 to 5 millimeters in thickness, and every millimeter is optimized for performance using a variety of processes, including hydroforming, roll forming, conventional stamping and tailor-rolled blanking.

STANDARD FEATURES

SURVEILLANCE FEATURE 5J3 MANUAL LAMP CONTROL 9G8





The headlamp control on the driver's side of the instrument panel operates the exterior lamps. If your Silverado does not have option 9G8, DELETE DAYTIME RUNNING LAMPS and AUTOMATIC HEADLAMPS, the Daytime Running Lamps and Automatic Headlamps can be turned OFF for one ignition cycle by rotating the headlamp control knob momentarily counter-clockwise. See your Silverado Owner's Manual.

Surveillance Feature: The Body Control Module (BCM) is calibrated to provide disabling of the exterior and interior automatic lighting. The BCM is located under the instrument panel to the left side of the steering column.

The Surveillance Feature can be activated by installing a terminated wire in cavity 21 of the Pink colored BCM connector X6. When a customer-provided terminated wire, e.g., GM #13582297, is installed in X6-21 and the wire is connected to vehicle ground via a customer switch, automatically controlled lighting is disabled or dimmed to Federally regulated level. BCM connector X6 is shown below. Note: If a White/Violet wire is in the BCM connector X6, cavity 21, remove the wire and tape back to the harness. The wire is not connected to another circuit; an engineering change to remove the wire is in progress.

Option SEO 9G8 - Delete Daytime Running Lamps and Automatic Headlamps. This option disables the Daytime Running Lamps and Automatic Headlamps control feature. Exterior lamps are only manually controlled (Option 9G8 is not available in Canada).

When the headlamp switch is in Auto with 9G8 installed, the instrument cluster, radio display and air conditioning illumination remains at daytime intensity and are dimmable only when the headlamp switch is rotated to the Parking Lamps or Headlamps positions. If SEO 9G8 is not installed, the displays are dimmable with the Headlamp switch in the AUTO position. The instrument cluster, radio and AC displays will dim if the Surveillance Feature is activated as described above.


Interior courtesy lamps, including dome lamps, can be turned OFF

with a three-position switch located in the front overhead console. The interior lamp control positions are: OFF - DOOR - ON

When the switch is in the OFF position, all interior lighting remains off whenever the doors are opened.


NOTE: Wiring connection or splice changes are to be removed before the vehicle is returned to civilian use.

CONNECTOR VIEWED FROM TERMINAL END



BCM Connector X6, Cavity 21

TIRE PRESSURE MONITOR WITH TIRE FILL ALERT



The Silverado 1500 Special Service Vehicle (SSV) 5W4 Crew Cab Package is equipped with a Tire Pressure Monitor System (TPMS) warns of low tire pressure. The Silverado SSV has an optional full size spare tire (00A) which includes a spare tire pressure sensor. When the optional spare tire from your vehicle or another SSV is placed in use as a road wheel, the TPMS will not read the presence of the new TPM sensor and must be calibrated. Refer to your owner's manual for additional information about calibration of the TPMS. See also the Tire Fill Alert feature.


SERVICE PARTS IDENTIFICATION LABEL



A Service Parts Identification (SPID) Label provides Vehicle Identification Number (VIN)-specific Option Code content list, Engineering Model Number (Nameplate, body style), Exterior paint system, Exterior paint color code and Interior trim level and color.

STANDARD FEATURES

REAR VISION CAMERA



- 1. View Displayed by the Camera in infotainment Screen
- 2. Corners of the Rear Bumper


Displayed images may be farther or closer than they appear. The area displayed is limited and objects that are close to either corner of the bumper or under the bumper do not display.

When the vehicle is in R (Reverse), at low speeds the RVC displays an image of the area behind the vehicle in the center stack display. The previous screen displays when the vehicle is shifted out of R (Reverse) after a short delay. To return to the previous screen sooner, press a button on the infotainment system, shift into P (Park), or reach a vehicle speed of 8 km/h (5 mph).


NOTE: The Rear Vision Camera will not work properly if the tailgate is down. If the tailgate is down, do not use this system.

Safety or driver assistance features are no substitute for the driver's responsibility to operate the vehicle in a safe manner. The driver should remain attentive to traffic, surroundings and road conditions at all times. Visibility, weather, and road conditions may affect feature performance. Read the vehicle's owner's manual for more important feature limitations and information.

FRONT SEATS AND INTERIOR TRIM

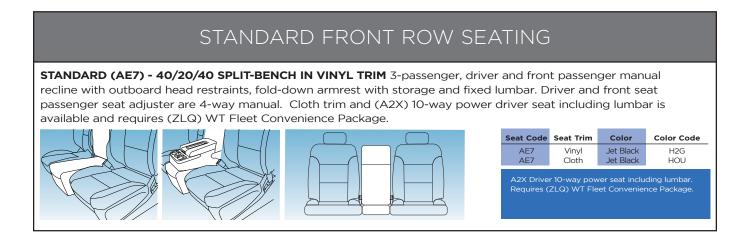

REAR SEATS AND INTERIOR TRIM

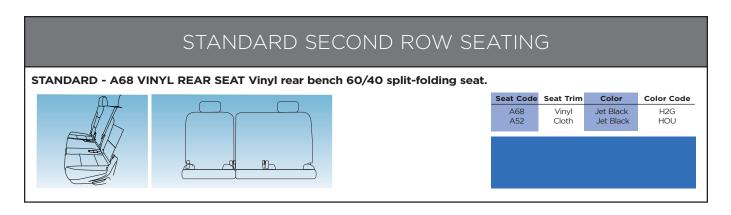


OPTIONAL FEATURES





5J9 REAR LAMPS FLASHING




CONNECTOR VIEWED FROM TERMINAL END

The Silverado Special Service Package has a Body Control Module (BCM) calibration which will flash the stop lamps and backup lamps to provide an alternating red - white light pattern to the rear of the vehicle. The rear lamps flashing mode is interrupted when ever the service brakes are applied.

The rear lamps flashing is activated by a customer-provided switched ground connected at the natural colored BCM connector XI, cavity 15. The rear lamps flashing feature can be operated separately or when connected to a headlamps flashing module.

NOTE: Wiring connection or splice changes are to be removed before the vehicle is returned to civilian use.

NQH AUTOMATIC TRANSFER CASE



Active, 2-speed electronic Autotrac with rotary controls, includes neutral position for dingy towing. Use the transfer case knob next to the steering wheel to shift into and out of four-wheel drive.

RPP WHEELS



17 x 8 Black Painted Steel

Q5U WHEELS



 17×8 Bright Silver painted aluminum (Included and only available with R13 Appearance Package)

OPTIONAL FEATURES

RW9 BEDSIDE STORAGE BOXES





Boxes are located on the left and right side.

GM PART 19417361 REAR UNDER SEAT COMBINATION LOCK BOX





3,700 cubic inches of storage, 16-gauge steel construction, 3-digit combination with custom hook-cam. Marine-grade carpet lining with weather and dust seal. Pin-lock hinge design, no drilling required for installation.

OPTIONAL FEATURES

QK2

MULTI-FLEX TAILGATE



Six function gate (Primary, easy access, load stop, full width step, inner gate load stop, inner gate work surface) available midyear.

POWERTRAIN

ENGINE		SINE TRANSMISSION		AXLE			
OPTION CODE	TYPE	DISPLACEMENT SYSTEM	FUEL CODE	OPTION CODE	ТҮРЕ	OPTION	RATIO
L84	V8	5.3/325	DI, Active Fuel Management	MQE	8 Speed auto w/OD and grade braking	GU6	3.23

EMISSIONS - MUST BE SPECIFIED

FE9	Emissions, Federal requirements
YF5	Emissions, California state requirements
NE1	Emissions, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington state requirements
NB8	Emissions override, California (allows a dealer in states that require California emissions - California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington - to order Federal emissions for a vehicle that will be registered in a state that has Federal emission requirements). Do not use for vehicles that will be registered in California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington. Requires (FE9) Federal emissions requirements. Not available in Maine or Vermont.
NB9	Emissions override, state-specific (for dealers ordering vehicles in (YF5) or (NE1) emission states - California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington) Allows a California dealer (YF5 emissions) to order (NE1) emissions with (NB9) emissions override code for registration in (NE1) states; or, a Connecticut, Delaware, Maine, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington dealer (NE1 emissions) to order (YF5) emissions with (NB9) emissions override code for registration in California.
NC7	Emissions override, Federal (for vehicles ordered by dealers in Federal emission states with (YF5) or (NE1) emissions - Not required for vehicles being shipped to California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont or Washington) Requires (YF5) California state emissions requirements or (NE1) Connecticut, Delaware, Maine, Massachusetts, New York, Pennsylvania, Rhode Island or Vermont state emission requirements.

NOTE: The 2022 Chevrolet Silverado Special Service Vehicle with the 5.3L Engine (L84) with Emission Option Codes:

FE9 NAME CERTIFICATION EMISSION, FEDERAL

NEI NAME CERTIFICATION EMISSION, GEOGRAPHICALLY RESTRICTED

YF5 NAME CERTIFICATION EMISSION, CALIFORNIA is certified to EPA Tier 3 BIN 70 standards and qualifies as ULEV 70 (Ultra Low Emission Vehicle) under California Air Resources Board (CARB) requirements, meaning it is 50-state certified.

EPA engine family or test group: MGMXT05.3388

TIRES

MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
Random	5	255/70R17	S	All season BW

SPEEDOMETER CERTIFICATION CALIBRATION

Specifications at ambient temperature of -10 to 120 degrees F (-23 to 49 Celsius). Inaccuracies due to vehicle speed sensing are included.

> **ACTUAL VEHICLE SPEED** INDICATED SPEED +/- 2 MPH 0 TO 120 MPH 0 TO 193 KPH +/- 3 KPH


The speedometer calibration is for the 2019 Silverado 5W4 Special Service with the 5.3L engine, automatic transmission with a 3.23 axle and 255/70R17 tires

2022 SILVERADO LTD 5	W4 SPECIAL SERVIC	E	
NTENTIONALLY BI ER FOR ONSTAR (S.

2022 SILVERADO LTD 5W4 SPECIAL SERVICE
THIS PAGE IS INTENTIONALLY BLANK PENDING FINALIZATION.
SEE YOUR DEALER FOR ONSTAR CONNECTED SERVICES OPTIONS.

AIRBAGS

INSTRUMENT PANEL TOP VIEW - APPROXIMATE FRONTAL AIRBAG DEPLOYMENT ZONES

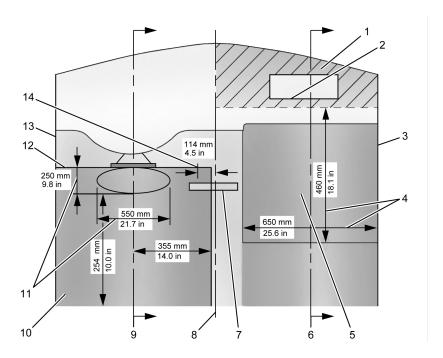


- 1. Passenger Side Instrument Panel Top Surface Zone
- 2. Frontal Outboard Passenger Airbag Module Trim Panel Rear Edge
- 3. Passenger Side Door
- 4. Approximate Dimensions of Inflated Airbag
- 5. Frontal Outboard Passenger Airbag Deployment Zone
- 6. Passenger Centerline
- 7. Inside Rearview Mirror
- 8. Vehicle Centerline
- 9. Driver Centerline
- 10. Driver Airbag Deployment Zone
- 11. Driver Inflated Airbag Dimensions
- 12. Front of Steering Wheel (See also "Side View of Driver Frontal Airbag Deployment Zone" Following)
- 13. Driver Side Door
- 14. Shift Selector Arc

See Customer-Installed Equipment.

Sitting too close to an airbag when it deploys can increase the risk of serious injury or death. Always properly wear your seat belt. See Owner's Manual for more information

AIRBAGS


SIDE VIEW OF DRIVER FRONTAL AIRBAG DEPLOYMENT ZONE

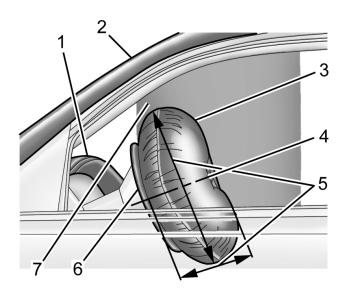

- 1. Top of Instrument Panel
- 2. Top Edge of Windshield
- 3. Inflated Airbag Steering Wheel
- 4. Centerline of Steering Column at Mid-Tilt
- 5. Driver Inflated Airbag Dimensions (250 mm (9.8 in) From Front of Steering Wheel and 550 mm (21.7 in) Diameter From Center of Steering Wheel
- 6. Front of Steering Wheel
- 7. Driver Airbag Deployment Zone Including Inflated Driver Airbag

See Customer-Installed Equipment.

SIDE VIEW OF FRONTAL OUTBOARD PASSENGER AIRBAG DEPLOYMENT ZONE

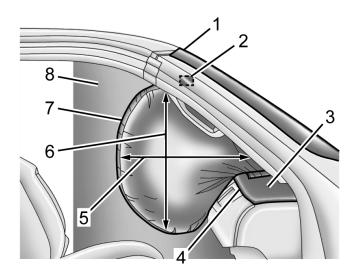


- 1. Top Edge of Windshield
- 2. Inside Rearview Mirror
- 3. Instrument Panel Top Surface Zone
- 4. Frontal Outboard Passenger Airbag Module Trim Panel Rear Edge
- 5. Inflated Airbag Horizontal Dimension (Approximately 460 mm (18.1 in)
- Inflated Airbag Vertical Dimension (from Top of Occupant s Lap to Headliner)
- 7. Inflated Airbag Instrument Panel
- 8. Frontal Outboard Passenger Airbag Deployment Zone See Customer-Installed Equipment.

Sitting too close to an airbag when it deploys can increase the risk of serious injury or death. Always properly wear your seat belt. See Owner's Manual for more information

AIRBAGS


ROOF-RAIL MOUNTED HEAD-CURTAIN AIRBAG DEPLOYMENT ZONES - PASSENGER SIDE SHOWN, DRIVER SIDE SIMILAR

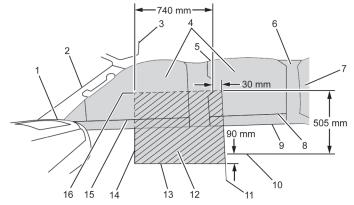

- Front of Deployment Zone at Bottom of Windshield Pillar Trim
- 2. A-Pillar Trim with Grab Handle (Passenger Side)
- 3. Sun Visor
- 4. Roof rail mounted head-curtian Airbag Deployment Zone Seat Rows 1 and 2 and Cargo Area
- 5. Top of Roof rail mounted head-curtian Airbag Deployment Zone - Along Roof-rail at Edge of Headliner
- 6. C-Pillar Upper Trim
- 7. Rear Window
- 8. Top Edge of Rear Door Trim
- Bottom Edge of Roof rail mounted head-curtian Airbag Deployment Zone at Top of Side Door Armrests
- 10. Top Surface of Front Seat Cushion (with Seat Fully Lowered)

- 11. Rear Edge of Seat-Mounted Side Impact Airbag Deployment Zone (30 mm (1.2 in) Rearward of Back Edge of B-Pillar Trim Grab Handle
- 12. Seat-Mounted Side Impact Airbag Deployment Zone
- 13. Bottom Edge of the Seat-Mounted Side Impact Airbag Zone (90 mm (3.5 in) Below Top of Seat Cushion with the Seat Fully Lowered
- 14. Front Edge of Seat Mounted Side Impact Deployment Zone (740 mm (29.1 in) Forward of Back Edge of B-Pillar Trim Grab Handle)
- 15. Top Edge of Front Door Trim
- 16. Top Edge of Seat-Mounted Side Impact Deployment Zone (505 mm (19.9 in) Above Top Surface of Seat Cushion with the Seat Fully Lowered

ROOF RAIL MOUNTED HEAD CURTAIN AIRBAG - DRIVER AND OUTBOARD FRONT PASSENGER DEPLOYMENT ZONES - VIEW FROM REAR OF VEHICLE

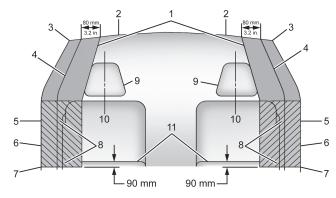

- 1. Roof-Rail Mounted Head-Curtain Airbag Deployment Zone
- 2. Underside of Headliner
- 3. Edge of Headliner
- 4. Inner Center and Rear Pillar Trim
- 5. Inner Front and Rear Door
- 6. Side Door Upper Armrests and Rear Quarter Trim Armrests
- 7. Bottom Edge of Seat-Mounted Side Impact Airbag Deployment Zone (90 mm (3.3 in) Below Top Surface of Outboard Front Seat Cushion with Seat Fully Lowered)
- 8. Seat-Mounted Side Impact Deployment Zone
- 9. Front Seat Head Restraint
- 10. Seat Centerline
- 11. Top of Seat Cushion

Sitting too close to an airbag when it deploys can increase the risk of serious injury or death. Always properly wear your seat belt. See Owner's Manual for more information

AIRBAGS FAQ

Q: Can equipment such as radar devices, video cameras, and radio trees be mounted in a specialty vehicle equipped with a right front passenger frontal airbag?

A: Yes, but care must be taken to properly mount the equipment outside of the airbag "deployment zone."

Q: What is the airbag "deployment zone"?

A: The term "deployment zone" describes the space an airbag takes up when fully inflated. Airbags need room to work properly, and anything in the "deployment zone" - such as improperly mounted equipment - can greatly affect the performance of the airbag.

Q: How can I identify the airbag "deployment zone" in my vehicle?

A: See Airbag Deployment Diagrams for more information. The diagrams provide the approximate dimensions of the "deployment zones" for your specialty vehicle. Before doing any service work, including the installation of any equipment, consult the appropriate service manual.

Q: Is it possible to shield equipment so it does not interfere with airbag deployment?

A: While shielding may protect certain equipment from being damaged or dislodged, it may also negatively affect how an airbag inflates. Therefore, we do not recommend the placement of any equipment in the deployment zone, even if shielded.

Q: Can the installation of push bumpers on the front end of the vehicle affect the deployment of the airbag?

A: It is not likely that installing push bumpers will affect deployment for the airbag as long as the vehicle structure itself is not modified. GM is not aware of any adverse defects effect on the deployment of the front airbags due to use of many aftermarket push bumpers installed on current GM police vehicles

See "Adding Equipment to the Airbag-Equipped Vehicle" in the owner manual for more information.

Customer-Installed Equipment

Before installing equipment, read the following.

Airbags inflate with great force, faster than the blink of an eye. No objects, such as shotguns, should be placed over or near the airbag covers. Equipment mounted too close to an inflating airbag could prevent the airbag from operating properly to protect the occupants or could be forced into an occupant or break and become a dangerous projectile, causing severe injury or even death. To help prevent injury and to allow the airbag to perform as it was designed, do not mount equipment inside the airbag deployment zones.

Do not attach anything to the steering wheel hub or mount any equipment within the deployment zone for the driver airbag.

Do not mount equipment on the passenger side of the instrument panel top pad deployment zone. Equipment should not be mounted on or around the passenger airbag opening because of a deploying airbag. To allow the airbag to perform as it was designed, do not mount equipment inside the airbag deployment zone.

Do not mount a security barrier such that the ends of the barrier or brackets are within the roof-rail airbag deployment zones.

Avoid installing wiring for roof-rail emergency lighting or radio antennas that may restrict the proper deployment of the roof-rail airbags.

GM approved service procedures must be followed to remove and reinstall the instrument panel to the pad to ensure proper airbag deployment.

The police vehicle has a rollover sensor mounted on the centerline of the vehicle between the driver and front outboard passenger positions. If the vehicle has individual front seats, the rollover sensor will be exposed. Do not mount equipment within 25 mm (1 in) of the rollover sensor. This may affect the performance of multiple restraint systems.

Always use seat belts and the correct restraint for your child's age and size, even with airbags. Even in vehicles equipped with the Passenger Sensing System, children are safer when properly secured in a rear seat in the appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with an active frontal airbag. See the Owner's Manual and the child safety seat instructions for more safety information.

MAINTENACE / LIMITED WARRANTY

INCLUDED MAINTENANCE	One visit within first year of vehicle delivery ¹
BUMPER-TO- BUMPER LIMITED WARRANTY	3 years/36,000 miles ² . Bumper-to-Bumper Limited Warranty with no deductible
TRANSFERABLE POWERTRAIN LIMITED WARRANTY	Qualified Fleet Customers: 5 years/100,000 miles ³
TIRES ⁴	3 years/36,000 miles ² ; coverage prorated after first 12,000 miles
ROADSIDE ASSISTANCE AND COURTESY TRANSPORTATION	Qualified Fleet Customers: 5 years/100,000 miles ³
RUST-THROUGH	6 years/100,000 miles ²
CORROSION	3 years/36,000 miles ²
WHEEL ALIGNMENT AND BALANCE	Up to 7,500 miles ⁶

^{1.} Includes first required maintenance visit as stated in vehicle maintenance schedule. Maintenance visit consists of oil change, tire rotation and Multi-Point Vehicle Inspection. Does not include air filters. See participating dealer for other restrictions and complete details. Excludes vehicles ordered with fleet delete option RY9.

2. Whichever comes first. See dealer for limited warranty details. 3. Whichever comes first. A Qualified Fleet User is defined as a company that has purchased and registered or leased five (5) or more new cars/or trucks solely for use in its operation during the current or preceding calendar year, model year, preceding twelve (12) month period, or that owns or leases fifteen (15) or more cars and trucks. Excludes rental customers. See dealer for details. 4. Tires also covered under the Bumper-to-Bumper limited warranty but are prorated based upon mileage. See dealer for limited warranty details. 5. If the vehicle has a warrantable failure, see your Owner's Manual for full details on the Courtesy Transportation program. 6. Customer maintenance item after 7,500 miles.



GM reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications, models, and availability. Specifications, dimensions, measurements, ratings, and other numbers in this catalog and other printed materials provided at the dealership or affixed to vehicles are approximates based upon design and engineering drawings and prototypes and laboratory tests. Your vehicle may differ due to variations in manufacture and equipment. Since some information may have been updated since the time of printing, please check with your GM dealer for complete details. Some of the equipment shown or described throughout this publication may be available at extra cost, and/or is supplied by an independent supplier.

Copyright 2020 General Motors. All rights reserved. All text, mages, graphics, and other materials in this publication are subject to the copyright and other intellectual property rights of General Motors. These materials may not be reproduced, distributed, or modified without the express written permission of General Motors. The marks appearing in this publication including, but not limited to: GM and the GM logo; Chevrolet and their respective logos, emblems, slogans, and vehicle model names and body designs; and other marks such as GM Fleet and Commercial are trademarks and/or service marks of General Motors, its subsidiaries, affiliates, or licensors.

For more detailed information, contact your District Sales Manager or see the online order guide at gmfleet.com/police.







